

IT 10130




Standard equipment


- Indoor use
- Traction at maximum height
- Front hydraulic drive with electrical controls on platform. 3 selectable drive speeds.
- Negative parking brakes with hydraulic disengagement.
- 90° steering.
- Manual platform extension 1.2 m.
- Horn.
- Manual emergency lowering device.
- Cylinder holding valves.
- Traction battery 24 V – 250 Ah (C5.)
- Battery charger with automatic switch-off 24 V – 40 A.
- Audible motion alarm.
- Inclinator with motion blocking device and alarms.
- Mechanical wheel drive release for emergency hauling.
- Battery cut-out plug.
- Rubber non-marking tyres 16x6-8".
- Mechanical scissor protections.
- Pothole protections.
- Hourmeter.
- Battery control system with low-voltage cut-out protection.
- Fold down railings.
- Overload sensor
- CE – EN 280 marking.

Options

- 220-V cable with plug, socket and safety cut-out.
- Battery 24 V – 410 Ah + battery charger 24 V – 50 A.
- Flashing beacon.
- Proportional controls with diagnostics.



iteco 

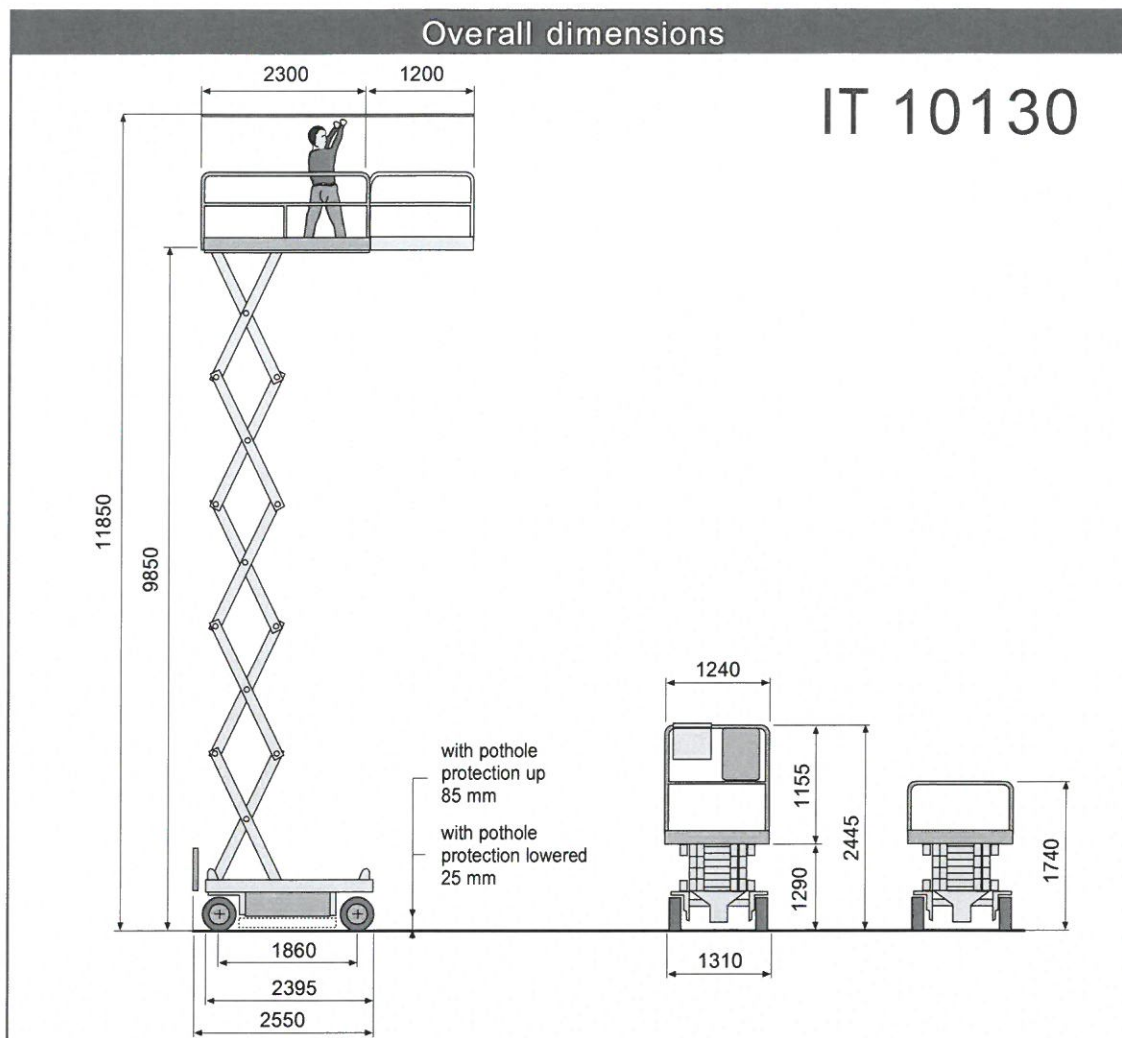

Technical specifications

Capacity (including 3 people)	kg	300
Lift time (without load)	s	55
Lower time (with load)	s	32
DC motor	V/kW	24/3
Battery voltage	V	24
Battery capacity	Ah (C5)	250 - 2x205
Battery weight	kg	4x45 - 8x35
Battery charger	V/A	24/40
Max. hydraulic pressure	bar	205
Traction speed (fast)	km/h	2,8
Traction speed (slow)	km/h	1,4
Traction speed (security)	km/h	0,7
Gradeability	%	15
Inside turning radius	m	0,17
Outside turning radius	m	2,40
Tyre dimensions	mm	418x150
Tyre type		16x6-8"
Total weight	kg	2740 ⁽¹⁾ - 2860 ⁽²⁾

(1) Standard version • (2) Optional version - with 8-battery kit

Note: data, descriptions and illustrations are not binding for Iteco S.p.A. that reserves the right to make modifications to the production without prior notice thereof.

C070 - 0400 - 20 - 200